




SLASH ENERGY USE BY **70%**
AND **SAVE**

THE BENEFITS OF VARIABLE SPEED & STEP TECHNOLOGY

EnviroMAX pumps use brushless, permanent magnet motors which offer high efficiency levels compared with conventional induction motors. Combined with the latest in electronic control, this allows the motor/pump to run at varying speeds.

Step technology, allows you to select a duration for each speed setting and automatically switches to the next speed/step after the time is up. This allows you to fine tune your pool filtration and circulation and get the most from your variable speed pump.

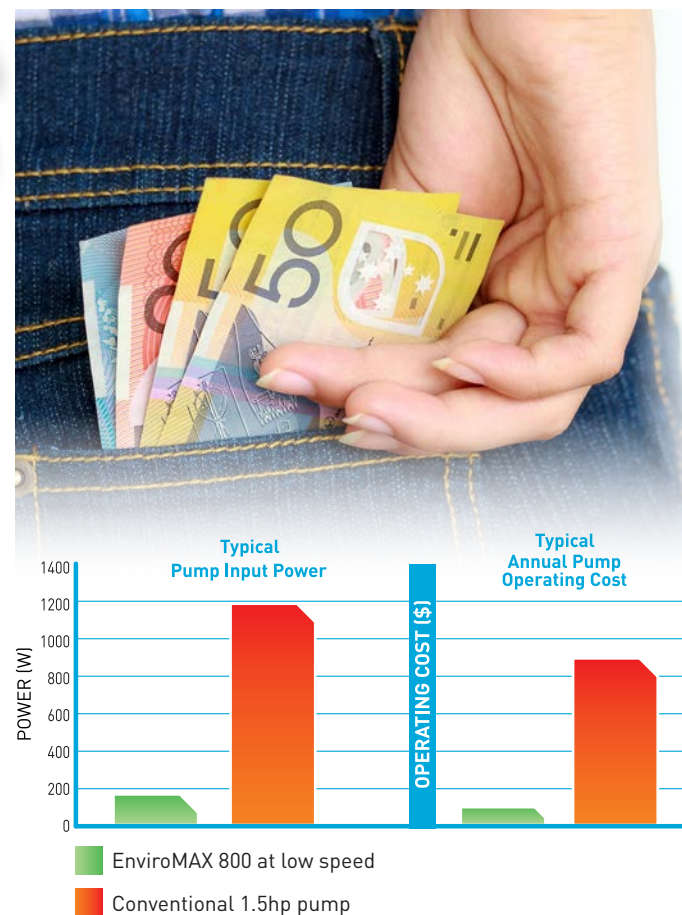

Other pumps		Sta-Rite ENVIROMAX 800		
Existing Pump	Annual operating cost*	Annual operating cost	Annual saving	Annual reduction in CO ₂ emissions
1.5HP	\$912	\$70	\$842	3370Kg
1.0HP	\$657	\$70	\$587	2246Kg

* Calculation based on typical pump performance data with running time of 8hrs per day, 365 days per year and \$0.29 per kW/hr. EnviroMAX cost based on EnviroMAX 800 running time for 1 turnover of a 75,000L pool and off-peak rates \$0.14 kW/hr. Actual savings will vary depending on pool system configuration and usage. Pentair takes no responsibility if advertised savings are not achieved.



1 - 21 Monash Drive,
Dandenong South,
VIC 3175
1300 137 344
www.pentairpool.com.au

Unless otherwise indicated, copyright in the content of this document is the property of Pentair Aquatic Systems Australia under Australian copyright law. Unless otherwise indicated, content may not be reproduced or transmitted without our prior written permission.

Pumps / Filters / Heaters / Heat Pumps / Cleaners / Sanitizers / Automation / White Goods / Water Features / Maintenance Products
L300295

ENVIROMAX VARIABLE SPEED PUMPS

PENTAIR AQUATIC SYSTEMS WWW.PENTAIRPOOL.COM.AU



ENVIROMAX

FEATURES AND BENEFITS

The Sta-rite EnviroMAX pumps are ideal for new or existing pools. Utilising advanced hydraulic design and the latest technology in permanent magnet, variable speed motors, the Sta-rite EnviroMAX pumps have the perfect combination of efficiency and performance.

EnviroMAX pumps deliver energy savings and the power when you need it. You will also have the peace of mind that you are doing your bit for the environment and reducing your carbon foot print.

- ▶ Variable speed pumps, with up to 4 programmable speeds, allows you to effortlessly select the most efficient setting to meet your filtration, cleaning and water feature needs.
- ▶ Brushless, permanent magnet motors deliver high efficiency, low noise levels and servcability.
- ▶ Fault protected motors prevent damage by automatically shutting down the motor in the event of a locked rotor, under-voltage, over-voltage or over-current condition and will automatically reduce the speed during an over temperature condition.
- ▶ Precision-fit internal components and superior hydraulic design deliver effortless performance, energy savings and extended pump life.
- ▶ Constructed of our durable, thermoplastic, composite resin, so you can be sure it will stand up to the harshest conditions.
- ▶ The Cam and Ramp™ lid is easy to remove and locks in place with a quarter turn, making inspection and cleaning a breeze.
- ▶ The high-capacity trap holds a large amount of debris, so you clean less often. Quick-disconnect plumbing unions.



The EnviroMAX Variable Speed pumps have earned the Eco Select brand distinction as some of the “greenest” and most efficient choices from Pentair. Eco Select products are designed to help you save energy, conserve water, eliminate or reduce noise, or otherwise contribute to a more environmentally responsible equipment system.




ENVIROMAX 800


	LOW	MED	HIGH	ADJUSTABLE RANGE
RPM	1450	2400	2850	1000-2850
Max. motor input power P ₁	160W	595W	975W	
Max. motor output power P ₂	130W	475W	800W	
Max. Current	1.3A	4.4A	6.5A	
Voltage	230-240V 50Hz single phase			
Max. Rating	2850RPM, 975W, P2 800W, 6.7A			
Motor type	Brushless, Radial flux, permanent magnet, DC			
Ingress protection	IP25			
Inlet connection	ABS Barrel Union to suit 50mm PVC pressure pipe to AS/NZS 1477			
Outlet connection	ABS Barrel Union to suit 50mm PVC pressure pipe to AS/NZS 1477			
Max. Water temperature	40°C			
Max. Ambient temperature	50°C			
Sound power level (Lwa)	LOW: 57.5dB - MED.: 65.2dB - HIGH: 69.3dB			

ENVIROMAX 1500

	LOW	MED	HIGH	OVERRIDE
RPM	1400	2200	3000	3150
Max. motor input power P ₁	235W	750W	1840W	2100W
Max. motor output power P ₂	188W	600W	1470W	1700W
Max. Current	1.2A	3.4A	8A	9.6A
Voltage	230-240VAC 50Hz Single phase			
Motor type	Brushless, Axial flux, permanent magnet, DC			
Ingress protection	IPX6			
Inlet connection	ABS Barrel Union to suit 50mm PVC pressure pipe to AS/NZS 1477			
Outlet connection	ABS Barrel Union to suit 50mm PVC pressure pipe to AS/NZS 1477			
Max. Water temperature	40°C			
Max. Ambient temperature	55°C			
Sound power level (Lwa)	LOW: 69dB - MED.: 63dB - HIGH: 57dB			

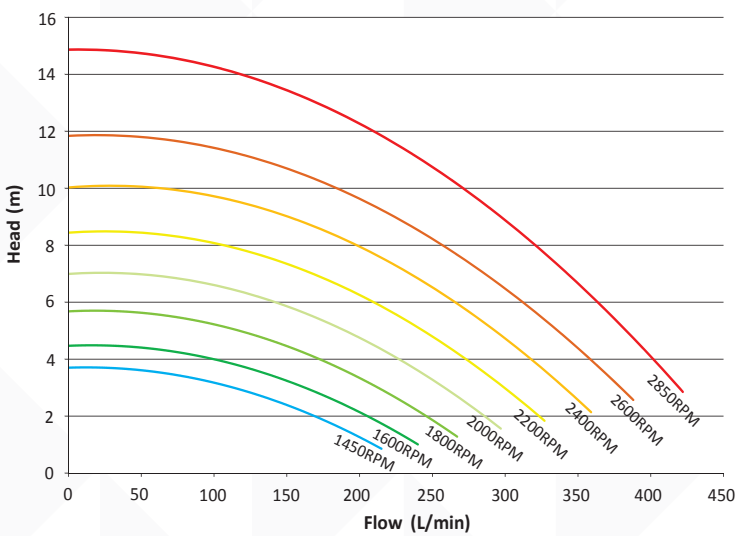

EnviroMAX 800 Performance Chart

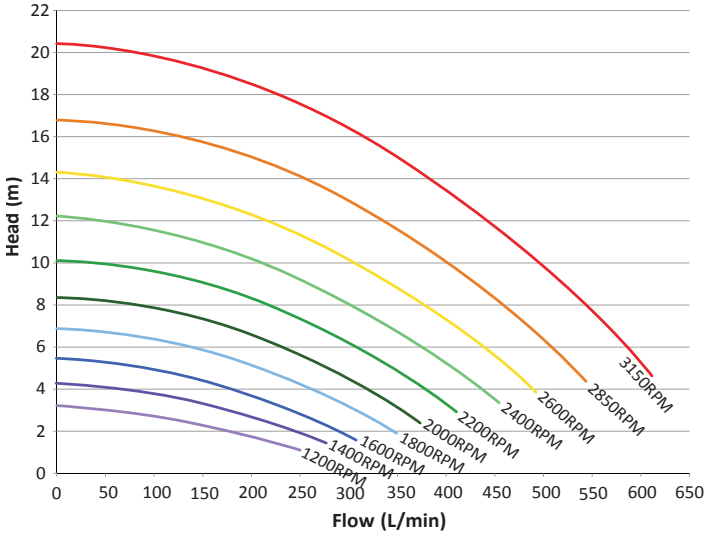

EnviroMAX 1500 Performance Chart

